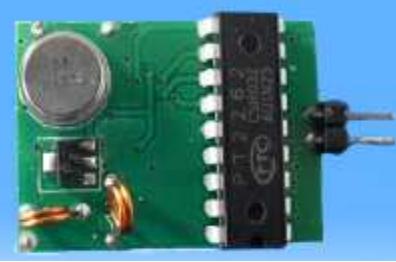


ADD: the 3rd floor,xinwucun building,Longzhu Rd,Nanshan District,Shenzhen China

Contact: Ms Eliza ; Cell: (0086)18218720167; TEL: (0086)755-26784316; Email:
cdsales01@gmail.com

Wireless Transmitter

Product Picture.:	Model No.:	Specification.:
		wireless Transmitter
	CDT01	<ul style="list-style-type: none">1).Transmit mode: Amplitude modulation AM2).Operating Frequency: 315MHZ/433MHZ3).Quiescent current: ≤0.1UA4).Operating voltage: DC 3~12V5).Dimensions:19*19mm6).Frequency stability: ±75KHZ
	CDT-88	<ul style="list-style-type: none">1).Transmit mode: Amplitude modulation AM2).Operating frequency: 315MHZ/433MHZ3).Quiescent current: ≤0.1UA4).Operating voltage: DC 3~12V5).Dimensions:14*18mm6).Frequency stability: ±75KHZ
	CDTF300	<ul style="list-style-type: none">1).Transmit mode: Amplitude modulation AM2).Operating frequency: 315MHZ/433MHZ3).Quiescent current: ≤0.1UA4).Operating voltage: DC 3~12V5).Dimensions:32.5*23.5mm6).Frequency stability: ±75KHZ
	CDTF301F	<ul style="list-style-type: none">1).Transmit mode: Amplitude modulation AM2).Operating frequency: 315MHZ/433MHZ3).Quiescent current: ≤0.1UA4).Operating voltage: DC 3~12V5).Dimensions:20*25mm6).Frequency stability: ±75KHZ

	CDT402-AB.1	<p>1).Transmit mode: Amplitude modulation AM 2).Operating frequency: 315MHZ/433MHZ 3).Quiescent current: ≤0.1UA 4).Operating voltage: DC 3~12V 5).Dimensions:14*18mm 6).Frequency stability: ±75KHZ</p>
	CDTM01	<p>Transmit mode: Amplitude modulation AM Operating frequency: 315MHZ/433MHZ Quiescent current: ≤0.1UA Operating voltage: DC 3~12V Dimensions:30.5*40mm Frequency stability: ±75KHZ</p>
	CDT-YG-2240	<p>Transmit mode: Amplitude modulation AM Operating frequency: 315MHZ/433MHZ Quiescent current: ≤0.1UA Operating voltage: DC 3~12V Dimensions:20*25mm Frequency stability: ±75KHZ</p>
	3000m transmit	<p>Item:CDTF-3000 Operating voltage: DC6--12V(Recommended operating voltage9V) Operating Current: 150mA-9V Operating frequency:315MHZ;433MHZ Communication mode 单发 Modulation rate: 3KHZ Modulation mode ASK(AM) Operating temperature range: -10°C ~ +60°C Dimensions: 30×17.3×8mm Interface: 3PIN (GAP2.54mm) Input signal interface: TTL electrical level Radiation power: 1.5w-9V Features:Small volume, high power, far distance (Openterritory300m)</p>